


# Combination Lock Instructions

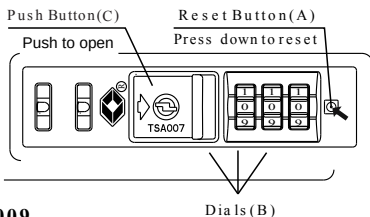

## TSA16009

Please reset your personal code by following the steps below.

### How to Set the Password:

1. Set the lock to the open position (factory code is 0-0-0).
2. Use a pen or similar tool to press and hold the reset button until you hear a “click” sound.
3. Rotate the three number dials (B) to set your desired personal code (e.g., 8-8-8)
4. Push the slide button (C) in the direction of the arrow until you hear another “click” sound.

At this point, the personal password setup is completed.

Please remember your password carefully.

To reset the combination, simply repeat steps 1 to 4

 **Note: The reset button cannot be pressed while the lock is in the locked position.**

Warning: If the cylinder is opened, please lock it again by turning it in the direction of the arrow to the red dot position (use any tool that fits in the cylinder)

